

| | |
|--|--|
| Product Code | 750023 (3/4" HP) 750123 (3/4" LP) |
| Description | BS1212 PT1 Ballcock / Float-valve comes with Brass locking Nuts |
| Size Range | 750023 (3/4" HP-1 1/2" Tail 13" arm) 750123 (3/4" LP- 1 1/2" Tail – 13" arm) |
| Max Operating Pressure | 10 Bar @ 20°C |
| Min Operating Pressure | 0.05 Bar |
| Max Operating Temperature | 65°C (Main body only! Plastic Float is for cold water use only <35C. A Metallic Float should be used for temperatures above this) |
| Min Operating Temperature | -20°C (Flowing fluid- No freezing or frozen water supply) |
| Flow Rate <i>See Graph on Next Page</i> | 0.5 Bar = 16.8 L/min 1.0 Bar = 24.03 L/min 2.0 Bar = 33.61 L/min 3.0 Bar = 41.2 L/min 4.0 Bar = 47.16 L/min 5.0 Bar = 51.42 L/min |
| Material Specification | Copper Alloy – Brass CW617N. |
| Manufactured To: | ISO 9001:2015 ISO 14001:2015 BS1212 PT1. Threads to ISO228 (G1/2"/BSPP) EN12165 |

BRASS PRODUCTS SHOULD NEVER BE USED IN UNDERGROUND APPLICATIONS!!

T: 01 842 6255 E: sales@Instantor.ie www.Instantor.ie

Sanbra Fyffe Ltd

Instantor Works, Santry Avenue, Santry, Dublin D09 K160


Doc Ref: TS750023

Issue V.2 February 2024 Page 2 of 2





Flowrate 3/4" FloatValve 750023

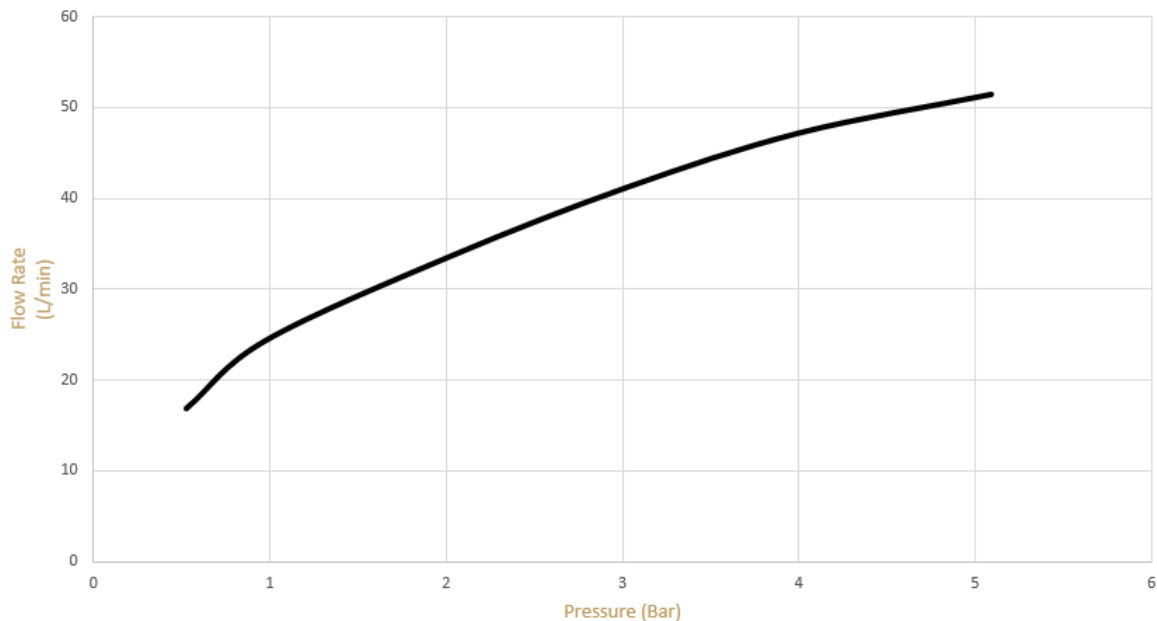

NOTE: Dublin Corporation Waterworks – “Regulations for Domestic Water Supply” states “A warning pipe to be efficient, shall be of a capacity sufficient to carry away water at the full rate of inflow to the cistern and be so designed that it will have a proper fall along its length and be free of dips or traps so that water cannot be retained when overflowing has Ceased” and “pipes should be suitably screened and from a cistern which is a closed vessel, this to prevent contamination and objects blocking pipes.”

Products are subject to a guarantee that is between Sanbra Fyffe and the final purchaser of the product and is subject to proof of purchase.

This guarantee does not affect any consumer statutory rights.

The guarantee covers manufacturing or material defects and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of homeowners, domestic and commercial applications and therefore the guarantee is subject to the product being properly selected for their intended service conditions.

Provided the product is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Accidental damage or abuse to the product are not covered by this guarantee.

The extent of this liability is limited to the cost of the replacement of the defective item and not to fitting or any consequential damage.

T: 01 842 6255 E: sales@Instantor.ie www.Instantor.ie

Sanbra Fyffe Ltd

Instantor Works, Santry Avenue, Santry, Dublin D09 K160

Doc Ref:TS750023

Issue V.2 February 2024 Page 2 of 2

